



OMNI+ Fireline (F²) Water Meter

4", 6", 8" and 10"

The OMNI™+ F² meter operation is based on advanced Floating Ball Technology (FBT).

Performance

The patented measurement principles of the OMNI+ F² meter ensure greater accuracy, expanded accuracy range and longer service life than any other comparable class meter. The OMNI+ F² meter has no restrictions on sustained flow rates within its continuous range. The floating ball measurement technology allows installation in any orientation and flows up to maximum rated capacity without undue wear or accuracy degradation.


Construction

The OMNI+ F² meter consists of two basic assemblies; the maincase and the measuring chamber. The measuring chamber assembly includes the "floating ball" impeller with a coated titanium shaft, hybrid axial bearings, integral flow straightener and an all electronic programmable register with protective bonnet. The maincase is made from industry proven Ductile Iron with an approved NSF epoxy coating. Maincase features are; easily removable measuring chamber, unique chamber seal to the maincase using a high pressure o-ring, testing port and a convenient integral strainer with optional drain/debris-flushing ports.


OMNI™+ REGISTER DISPLAY



Segment Test View



Totalizer View



Notification View



Flow Rate View

Conformance to Standards

The OMNI+ F² meter meets and far exceeds the most recent revision of AWWA Standard C703 class II. Additionally, the meter does not require a valve to meet these standards. Each meter is performance tested to ensure compliance. All OMNI meters are NSF/ANSI Standard 61, Annex F and G approved. The OMNI+ F² meter is UL (Underwriters Laboratories) Listed and FM (Factory Mutual) approved for use on fire protection and domestic water applications.

OMNI+ Electronic Register

The OMNI+ electronic register is hermetically sealed with an electronic pickup containing no mechanical gearing. The OMNI+ register features a programmable totalizer registration, an optional digital pulse signal, AMI/ AMR reading digits, and a resettable test totalizer. The large, easy-to-read LCD also displays both forward and reverse flow directions. The OMNI+ tamper-proof security cover can be positioned in any of 270 degrees of rotation, with indexing points at each of the 90-degree customary register viewing positions.

Magnetic Drive

Meter registration is achieved by utilizing a fully magnetic pickup system. This is accomplished by the magnetic actions of the embedded rotor magnets and the ultra sensitive register pickup probe. The only moving component in water is the "floating ball" impeller.

Measuring Element

The hydro-dynamically balanced impeller floats between the bearings. The Floating Ball Technology (FBT) allows the measuring element to operate virtually without friction or wear, thus creating the extended upper and lower flow ranges capable on only the OMNI+ F² meter.

OMNI+ Fireline (F²) Water Meter

4", 6", 8" and 10"

Strainer

The OMNI+ F² meter includes the Sensus designed "V" shaped UL Listed/FM approved strainer which utilizes a stainless steel screen along with Floating Ball Technology (FBT) to create a design that provides greatly improved accuracy even in difficult settings. A removable strainer cover permits easy access to the screen for routine maintenance. Strainer drain ports allow for easy discharging of debris without the need to remove the cover.


AMR/AMI Systems

Meters and Electronic Registers are compatible with current Sensus AMR/AMI systems and other AMI communication systems that use the Sensus UI1203 protocol.

Maintenance

The OMNI+ F² meter is designed for easy maintenance. Should any maintenance be required, the measuring chamber and/or strainer cover can be removed independently. Replacement parts or complete measuring chambers are available for repairs.

OMNI F²: 4", 6", 8" and 10"

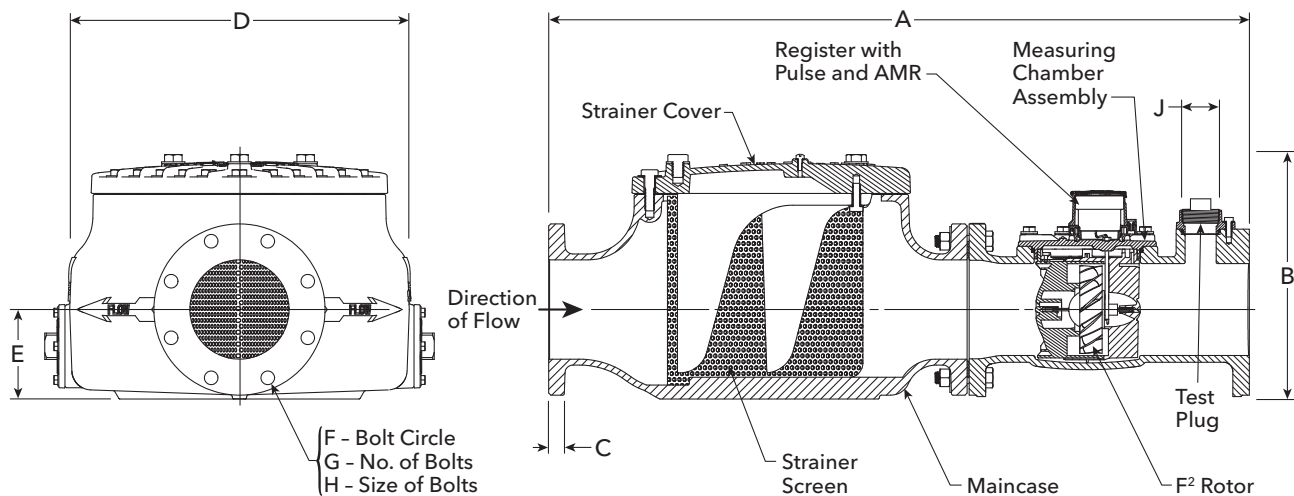

DIMENSIONS AND NET WEIGHTS

Meter and Pipe Size	Normal Operating Range		Connections	A	B	C	D	E	F	G	H	J	Net Weight	Shipping Weight	Standard Fireline*
4" DN 100mm	1.5 gpm .34 m ³ /hr	1200 gpm 227 m ³ /hr	Flanged	33" 838mm	13-11/16" 348mm	15/16" 24mm	17-1/2" 445mm	4-3/4" 121mm	7-1/2" 191mm	8	5/8" 16mm	2" 51mm	212 lbs. 96 kg.	252 lbs. 114 kg.	51-7/8" 1318mm
6" DN 150mm	3 gpm .681 m ³ /hr	2000 gpm 454 m ³ /hr	Flanged	45" 1143mm	15-3/4" 400mm	15/16" 24mm	22-3/8" 568mm	5-3/4" 146mm	9-1/2" 241mm	8	3/4" 19mm	2" 51mm	394 lbs. 179 kg.	449 lbs. 204 kg.	67-5/8" 1718mm
8" DN 200mm	4 gpm .91 m ³ /hr	3500 gpm 795 m ³ /hr	Flanged	53" 1346mm	18-1/2" 470mm	11/16" 17mm	31" 787mm	6-3/4" 171mm	11-3/4" 298mm	8	3/4" 19mm	2" 51mm	736 lbs. 334 kg.	786 lbs. 357 kg.	77" 1956mm
10" DN 250mm	5 gpm 1.1 m ³ /hr	5500 gpm 1249 m ³ /hr	Flanged	68" 1727mm	22-1/4" 565mm	11/16" 17mm	37-1/3" 948mm	8-1/2" 216mm	14-1/4" 362mm	12	7/8" 22mm	2" 51mm	1155 lbs. 524 kg.	1215 lbs. 551 kg.	90" 2286mm

*Standard Fireline lay length with optional spool piece added.

OMNI+ Fireline (F²) Water Meter

4", 6", 8" and 10"









SPECIFICATIONS

Service	Measurement of potable and reclaim water. Storage temperature: -22F (-30C) to 155F (68.3C)	Operating temperatures: Air: -22F (-30C) to 150F (65.6C) Water: 33F (0.6C) to 80F (26.7C)		
Operating Range (100% ± 1.5%)	4": 1.5 - 1000 GPM (0.34 - 227 m ³ /hr) 6": 3 - 2000 GPM (0.68 - 454 m ³ /hr)	8": 4 - 3500 GPM (0.91 - 795 m ³ /hr) 10": 5 - 5500 GPM (1.1 - 1249 m ³ /hr)		
Low flow (95% - 101.5%)	4": 0.75 GPM (0.17 m ³ /hr) 6": 1.5 GPM (0.34 m ³ /hr)	8": 2.5 GPM (0.57 m ³ /hr) 10": 3.5 GPM (0.79 m ³ /hr)		
UL Minimum Flow	8": 97% @ 3 GPM (0.68 m ³ /hr) 10": 97% @ 4 GPM (0.91 m ³ /hr)			
Maximum Continuous Operation	4": 1000 GPM (227 m ³ /hr) 6": 2000 GPM (454 m ³ /hr)	8": 3500 GPM (795 m ³ /hr) 10": 5500 GPM (1249 m ³ /hr)		
Maximum Intermittent Operation	4": 1250 GPM (284 m ³ /hr) 6": 2500 GPM (568 m ³ /hr)	8": 4700 GPM (1067 m ³ /hr) 10": 7000 GPM (1590 m ³ /hr)		
Pressure Loss	4": 6.4 psi @ 1000 GPM (0.44 bar @ 227 m ³ /hr) 6": 6.7 psi @ 2000 GPM (0.46 bar @ 454 m ³ /hr)	8": 5 psi @ 3500 GPM (0.34 bar @ 795 m ³ /hr) 10": 7 psi @ 5500 GPM (0.48 bar @ 1249 m ³ /hr)		
Maximum Operating Pressure	175 PSI (12 bar)			
Flange Connections	U.S. ANSI B16.1 / AWWA Class 125			
Test Ports	NPT			
Register	Fully electronic sealed register with programmable registration (Gal. /Cu.Ft./ Cu. Mtr. / Imp. Gal. / Acre Ft.)	Programmable AMR/AMI reading and pulse outputs Guaranteed 10-year battery life		
NSF Approved Materials	Maincase: Measuring Chamber: Rotor "Floating Ball": Radial Bearings: Thrust Bearings:	Coated Ductile Iron Thermoplastic Thermoplastic Hybrid Thermoplastic Sapphire/Ceramic Jewel	Magnets: Strainer Screen: Strainer Cover: Test Plug:	Ceramic Stainless Steel Coated Ductile Iron Stainless Steel

OMNI+ Fireline (F²) Water Meter

4", 6", 8" and 10"

Headloss Curves

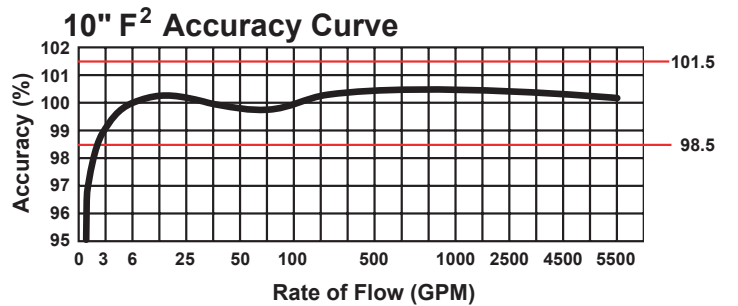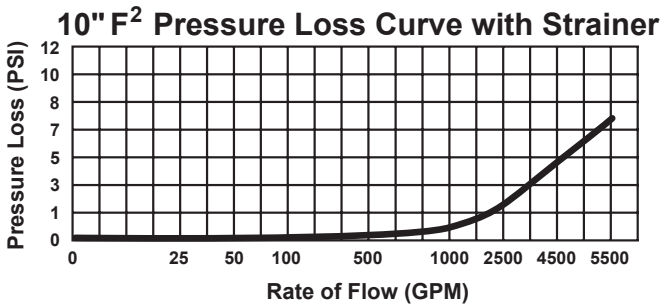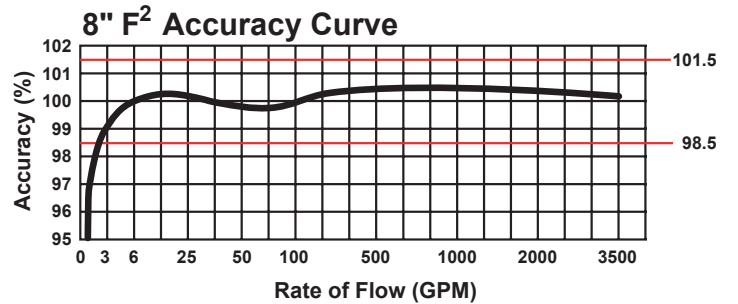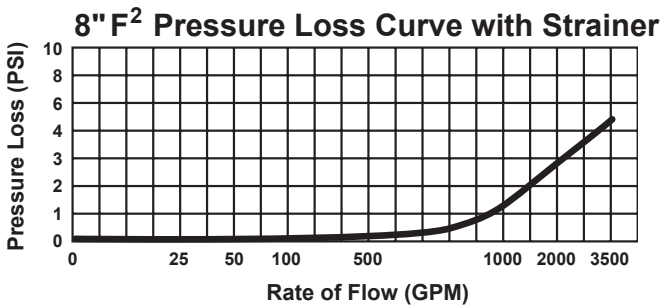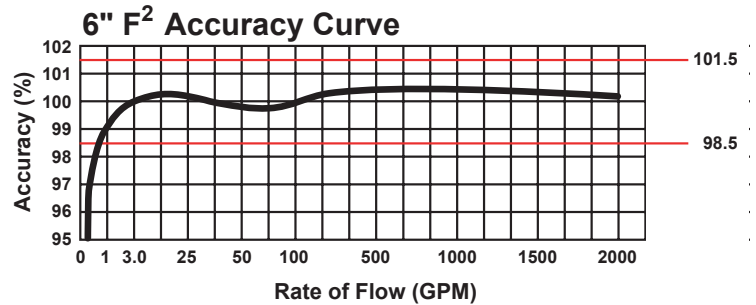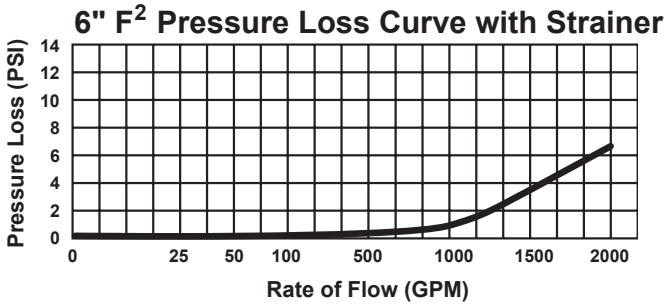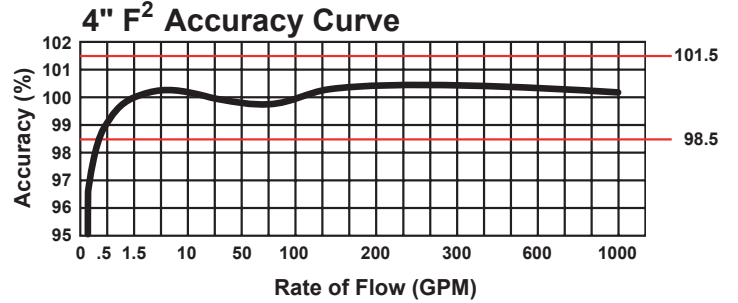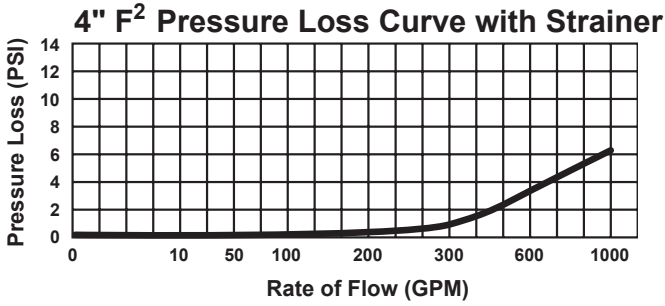

SENSUS | 637 Davis Drive | Morrisville, NC 27560 | 800.638.3748

©2021 Sensus. All products purchased and services performed are subject to Sensus' terms of sale, available at either sensus.com/TC or 1-800-638-3748. Sensus reserves the right to modify these terms and conditions in its own discretion without notice to the customer. The Sensus logo is a registered trademark of Sensus.

This document is for informational purposes only, and SENSUS MAKES NO EXPRESS WARRANTIES IN THIS DOCUMENT. FURTHERMORE, THERE ARE NO IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION, WARRANTIES AS TO FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY. ANY USE OF THE PRODUCTS THAT IS NOT SPECIFICALLY PERMITTED HEREIN IS PROHIBITED.